


HR/HVA/HVS- ULTRA PRECISION

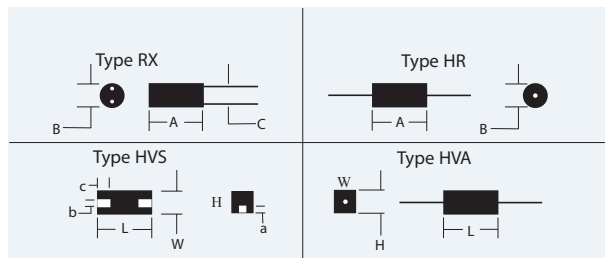

How Can the Ultra-Precision Series Help You?

Values from 0.1Ω thru 10 Megohms
 Tolerances ±0.01% (Std.) ... to ±0.005%
 TCR Char 5ppm (Std.) ... to 0±1ppm/°C
 Greater Stability to ±0.001%/year
 Temperature -65°C to +145°C

ELECTRICAL & PHYSICAL SPECIFICATIONS

PRC Type	Meets or Exceeds Environmental Conditions of:		Max. Watts 1% Res.Tol.	Max. Volts	(A) Length		(B) Diameter		Standard Space C	(ETP/OFHC) * Tinned Copper Leads		Resistance (Ω)		
	MIL-R-39005	MIL-R-93			mm ±1.57	(ins) ±.062"	mm ±.787	(ins) ±.031"		Diam. Max.	Length t (±.125")	Min.	Max. Standard	Max. Special


PRINTED CIRCUIT

PRC Type	Resistor	Power	Voltage	(A) Length (mm)	(A) Length (ins)	(B) Diameter (mm)	(B) Diameter (ins)	Standard Space C	Lead Diam. Max.	Lead Length t	Resistance Min.	Resistance Max. Standard	Resistance Max. Special
RX255N	RBR71	.25W	100V	7.92	(.312")	6.35	(.250")	.200"	.025"	1"	0.1	100K	150K
RX258N	---	.33W	300V	12.7	(.500")	6.35	(.250")	.200"	.025"	1"	0.1	250K	350K
RX378N	---	.5W	200V	12.7	(.500")	9.53	(.375")	.200"	.032"	1"	0.1	301K	500K

AXIAL LEAD

PRC Type	Resistor	Power	Voltage	(A) Length (mm)	(A) Length (ins)	(B) Diameter (mm)	(B) Diameter (ins)	Standard Space C	Lead Diam. Max.	Lead Length t	Resistance Min.	Resistance Max. Standard	Resistance Max. Special
HR103	---	.1W	50V	5.08	(.200")	2.54	(.100")	---	.020"	1.5"	1.0	10K	20K
HR175N	---	.2W	100V	7.92	(.312")	3.96	(.156")	---	.020"	1.5"	0.1	80K	100K
HR186N	---	.2W	150V	9.53	(.375")	4.75	(.187")	---	.025"	1.5"	0.1	100K	150K
HR188N	RBR74	.25W	150V	12.7	(.500")	4.9	(.193")	---	.025"	1.5"	0.1	125K	200K
HR256N	RBR56	.25W	200V	9.53	(.375")	6.35	(.250")	---	.032"	1.5"	0.1	127K	350K
HR258N	RBR55	.33W	300V	12.7	(.500")	6.35	(.250")	---	.032"	1.5"	0.1	226K	500K
HR2512N	RBR54	.5W	300V	19.05	(.750")	6.35	(.250")	---	.032"	1.5"	0.1	511K	1 MEG
HR3114N	RBR76	.5W	300V	20.62	(.812")	7.92	(.312")	---	.032"	1.5"	0.1	600K	1.5 MEG
HR3712N	RBR53	.66W	300V	19.05	(.750")	9.53	(.375")	---	.032"	1.5"	0.1	750K	2 MEG
HR3716N	RBR52	1W	600V	25.4	(1.000")	9.53	(.375")	---	.032"	1.5"	0.1	1.5 MEG	3 MEG
HR5016N	RBR57	1.5W	600V	25.4	(1.000")	12.7	(.500")	---	.032"	1.5"	0.1	2 MEG	5 MEG
HR5024N	---	2W	900V	38.1	(1.500")	12.7	(.500")	---	.032"	1.5"	0.1	3.01 MEG	7.5 MEG
HR5032N	---	2.5W	1200V	50.8	(2.000")	12.7	(.500")	---	.032"	1.5"	0.1	5.11 MEG	10 MEG

LEAD MOUNTED & SURFACE MOUNTED



* Commercially pure copper (electrolytic tough pitch/oxygen-free high conductivity)

PRC TYPE		Max. Watts	Max. Volts	H	L	W	a	b	c	d	Lead Dia. 1"L Min.	Resistance (Ω)	
AXIAL	SMD			mm ins.	mm ins.	mm ins.	±.015"	±.015"	±.015"	±.015"		Min.	Max.
HVA1	HVS1	0.2W	100V	3.30 .130"	9.14 .360"	3.18 .125"	.075"	.075"	.100"	.260"	.020"	0.1	75K
HVA2	HVS2	0.25W	150V	6.35 .250"	9.78 .385"	5.72 .225"	.125"	.112"	.100"	.310"	.025"	0.1	150K
HVA3	HVS3	0.5W	250V	6.35 .250"	12.7 .500"	6.35 .250"	.100"	.112"	.100"	.425"	.031"	0.1	500K
HVA5	HVS5	1.0W	600V	7.87 .310"	15.88 .625"	7.87 .310"	.075"	.112"	.100"	.551"	.031"	0.1	1MEG

ENGINEERING DATA:

RESISTANCE AND TOLERANCES

You can select any ohmic value or decimal part of an ohm with tolerances to ±0.005% 10Ω min. required for ±0.01% tol.

TCR CHARACTERISTIC

Standard: 0±5ppm/°C (100Ω and above);
 0±15ppm/°C. (values below 100Ω) - calculated between +25°C. and +100°C.
 (Please specify temperature span of operation.)
 Special: to 0±1 ppm/°C. - matching to 0±0.5 ppm/°C.

POWER VS. AMBIENT TEMP.

All Ultra resistors are designed for full load based upon ±1% res. tol. - providing the ambient temp. - plus the temp. rise due to self-heating does not exceed +125°C. Derated to zero power at +145°C. see Fig. 1.

STABILITY

To ±0.001% / yr. at 25°C. (no load).

THERMAL EMF

VS. COPPER TERMINALS

< ±3 microvolts per degree C.

INDUCTANCE


Non-inductive balanced reverse pi windings are standard on HR and RX. Special on HVS & HVA.

PROTECTIVE SEAL

Stress free base coat and epoxy case. Solder heat and solvent resistant.

MARKING (Identification)

PRC symbol, type, value and tolerance.

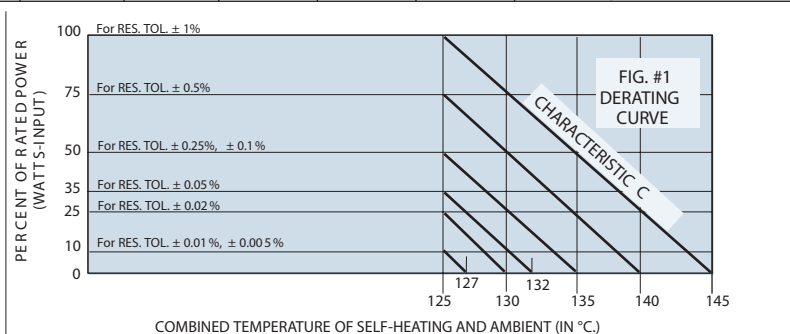

PRECISION RESISTOR CO., INC.

10601 75TH Street North, Largo, Florida 33777-1421 U.S.A.
 Tel: 727-541-5771 Fax: 727-546-9515
 Email: sales@precisionresistor.com
 Web Site: http://www.precisionresistor.com